



Aug. 30, 2002

FSN 300A tilting spindle Shaper with Aluminum Sliding Table


BASIC MACHINE INCLUDES:

- ◆ Aluminum carriage sliding on hardened steel guides
- ◆ Three-phase braking motor, 5 HP, 60 Hz
- ◆ Shaper split fence, each micro-adjustable
- ◆ Shaper reversing switch
- ◆ Spindle lock for 0° , -5° , 45°
- ◆ Under table dust collection
- ◆ Overload protection
- ◆ UL Standard
- ◆ CE Standards
- ◆ Service spanners
- ◆ Instruction handbook



TECHNICAL DATA:

Working table size	39 3/8" x 14 2/8"
Sliding table size	11 1/4" x 39 3/8" (59")
Shaper speeds	1400-3500-6000-8000 (10,000) RPM
Sliding Table Travel	50 3/4" (71 1/2")
Max. diameter of table opening	8 5/8"
Work spindle diameter (step)	3/4" and 1 1/4"
Spindle tilting	-5° to 45°
Spindle length	5"
Max. spindle stroke	5"
Max. dia. of tool above table	8"
Max. dia. of tool under table	7"
Suction dust hood diameter	4"
Motor	5 Hp, 60 Hz
Electrical	230V, 3Ø
Net weight	596 lbs.

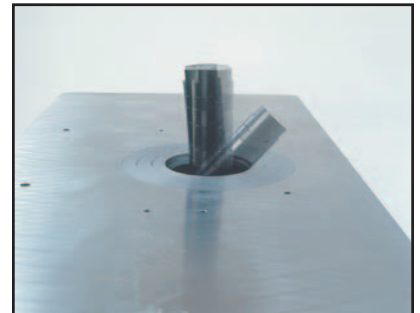

OPTIONS (Ordered with Machine):

- Single-phase braking motor, 3.6 HP, 60 Hz \$ 92
- Interchangeable spindle assembly 167
- Chuck for router bits (1/2" chuck, 10,000 RPM) 133

OPTIONS/ACCESSORIES (Available Anytime):

- Cross-cutting outrigger w/fence \$ 730
- Rt. & Lft. table extensions 95
- Tenoning table 47
- Tenoning protection 328
- Extra spindle (3/4", 1", or 1 1/4") 191
- Shaper Fence for round profiles 380
- Wheel trolley 149
- Shaper cutterhead kit - FH 40 R/1 122
- Shaper cutterhead kit - FH 40 R/4 213



Tech Mark, Inc.
 7901 Industry Drive
 North Little Rock, AR 72117
 PH: 501-945-9393 Fax: 501-945-0312
 Website: www.tech-mark.com